



Philmac Compression Fittings

Philmac_comp-fittings_v002

© Copyright Marley Pipe Systems (Pty) Ltd 2010




an *O*Aliaxis company

Philmac Compression Fittings

Marley Pipe Systems is proud to have been appointed as the authorized agent for the Philmac (Australia) range of compression and transition fittings. These fittings are available in sizes from 16 – 110mm and have a maximum operating pressure of 16 bar at 20°C.

Philmac is renowned for quality products and services. Their compression fittings comply with the requirements of a number of Australian specifications and, in South Africa, have a Certificate of Acceptance from JASWIC.

The Philmac fitting design uses the mechanical advantage of the nut thread to place the seal into a compressed position. This means no resistance when inserting the pipe into the fitting, thus eliminating damage or displacement to the seal during installation. Furthermore the fittings have no loose components which can be incorrectly assembled or lost.

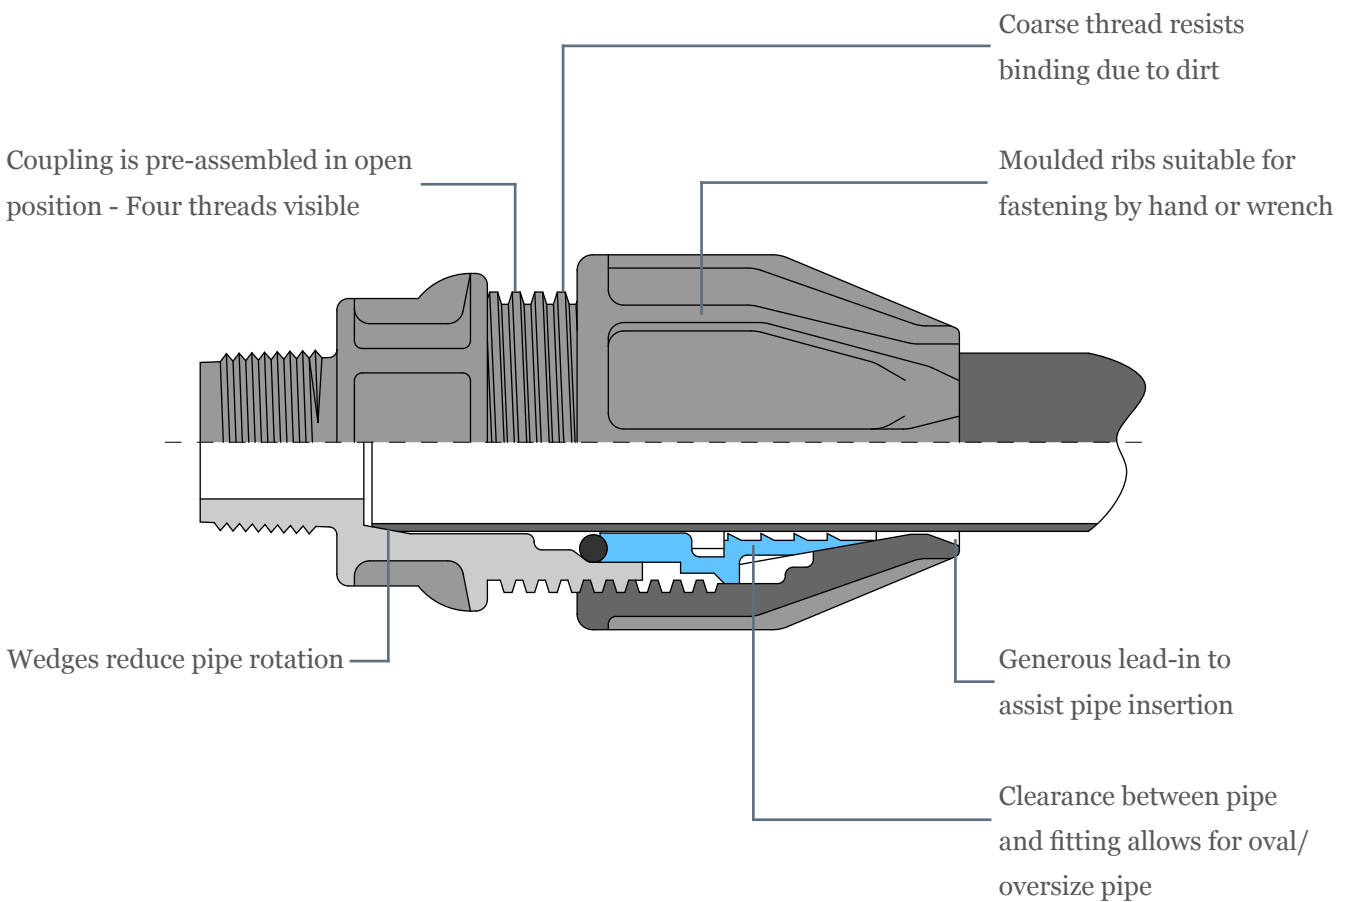



Couplings 16mm to 110mm
Slip Couplings 20mm to 63mm



Reducing Couplings
20mm x 16mm to 110mm x 90mm



Male Adaptors
16mm x 1/2" to 110mm x 4"



Female Adaptors
16mm x 1/2" to 110mm x 4"



Equal Tees 16mm to 110mm
Slip Tees 20mm to 63mm



Reducing Tees
25mm x 20mm to 63mm x 50mm



Male Iron Tees
25mm x 1/2" and 25mm x 3/4"



Female Iron Tees
16mm x 1/2" to 110mm x 4"



90° Elbows
16mm to 110mm



90° Male Elbows
25mm x 3/4" and 32mm x 1"



90° Female Elbows
16mm x 1/2" to 110mm x 4"



End Caps
16mm to 110mm



Blanking Plug set
20mm to 63mm



Threaded BSP Bush
15mm x 1/2" to 50mm x 2"



Threaded BSP Plug End
20mm x 15mm - 3/4" x 1/2" to
50mm x 40mm - 2" x 1 1/2"



Nipples

15mm x 1/2" to 50mm x 2"



Sockets

15mm x 1/2" to 50mm x 2"



Flanged Adaptors

50mm x 2" to 110mm x 4"